


PEWI-9500 12v P/N 9229682 24v P/N 9230682


— PERFORMANCE SERIES — CE Version Available



Dimensions

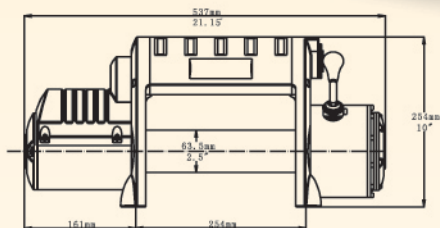

Mounting Bolt Pattern

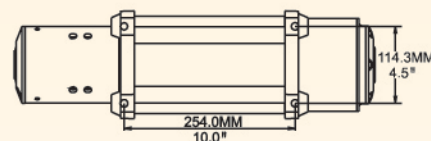

FEATURES & SPECIFICATIONS

| | |
|----------------------|---|
| Rated Line Pull | 9500lbs (4305kgs) Single-line |
| Motor | 6.6hp 12V/24V, Series Wound |
| Control | Wireless Multi-control |
| Gear train | 3-Stage Planetary |
| Gear reduction ratio | 218:1 |
| Clutch | Sliding Ring Gear |
| Braking | Automatic In-The-Drum |
| Drum size | Diameter 2.52" (64mm) Length 8.82"(224mm) |

| | |
|--------------------------------------|----------------------|
| Synthetic Rope (Dyneema SK-75 fiber) | 3/8"x94' (9.4mmx28m) |
| Aluminium Fairlead | AFL |

| | |
|----------------------------|---|
| Recommended Battery | 650CCA minimum for winching |
| Battery Leads | 2 gauge, 72"(1.8m) |
| Finish | Yellow |
| Weight | 65lbs(29.5kgs) |
| Overall dimensions (LxWxH) | 21.15"x6.3"x10.0"(537x160x254mm) |
| Mounting Bolt Pattern | 10.00±0.015INx4.50±0.010IN(254x114.3mm) |

Line Pull & Cable Capacity

| Layer of cable | 1 | 2 | 3 | 4 |
|----------------|----------|------|------|------|
| Rated line | Lbs 9500 | 8435 | 7640 | 7086 |
| Pull per layer | Kgs 4305 | 3822 | 3460 | 3212 |
| Cumulative | Ft 16 | 42 | 72 | 94 |
| Cable capacity | m 5 | 12 | 21 | 28 |

Line Speed & Amp Draw-First Layer

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 9500 |
|---------------|-----|---------|------|------|------|------|------|
| | Kgs | | | 906 | 1813 | 2719 | 3626 |
| Line speed | 12V | 28.7 | 16.5 | 12.6 | 9.4 | 8.8 | 6.9 |
| | 24V | 32.8 | 17.3 | 14.1 | 10.7 | 9.5 | 8.0 |
| Motor Current | 12V | 65 | 140 | 210 | 285 | 360 | 405 |
| | 24V | 45 | 80 | 120 | 155 | 180 | 200 |

